



Frequency Response
Top - Compensated and Averaged
Bottom - Raw Data for Five Headphone Positions

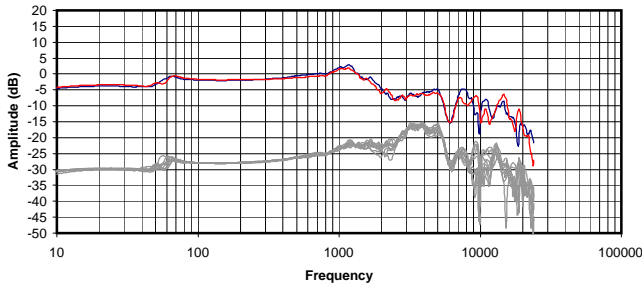


Isolation
Attenuation of External Sound vs. Frequency

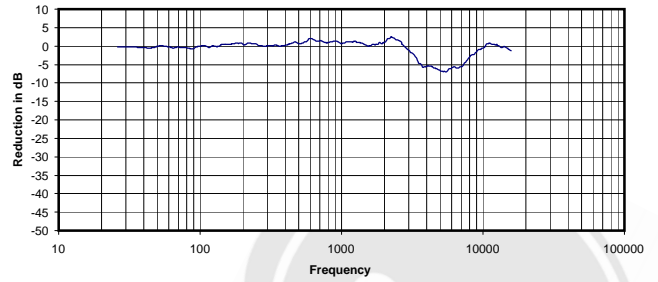


Electrical Impedance and phase measurements unavailable for Electrostatic headphones.


30 Hz Square Wave

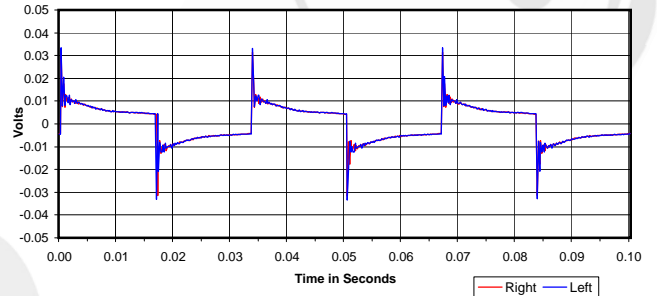


300 Hz Square Wave

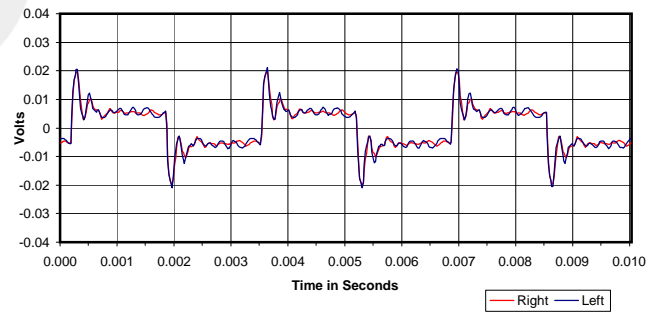

%THD+noise @ 90dB and 100dB

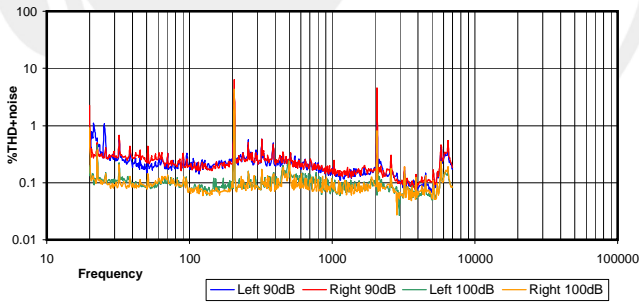

Impulse Response

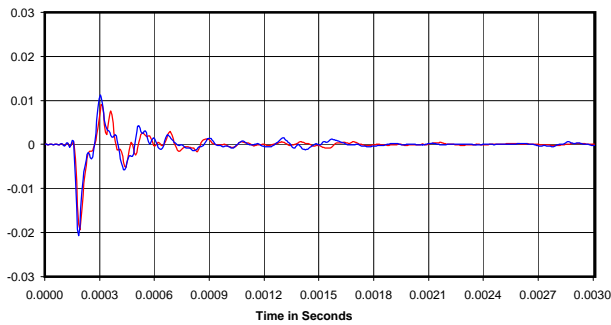

Volts RMS required to reach 90dB SPL:
Impedance @ 1kHz:
Power Needed for 90d BSPL
Broadband Isolation in dB (100Hz to 10kHz):

0.000 Vrms
#DIV/0! Ohms
#DIV/0! mW
0 dBr